


R/stik® Mounting Tape for Use with R/bak® Cushion Mounting Materials

R/stik® Mounting Tape, when used with Rogers R/bak® cushion mounting materials, can speed up make-ready for flexographic printing, help presses run longer, and allow finer line work to be done on press.

R/stik mounting tape creates a bond between photopolymer printing plates and the polyester side of R/bak SS and SF materials. It may also be used to build up cylinders during make-ready.

- Very easy to handle and apply
- High shear strength for good anchorage
- Internally supported for stability and tear resistance
- Rubber based PSA for clean, easy removal
- Easy release liner
- 0.005" (0.127mm) thickness
- Available in 18" x 50 yds. (457.20 mm x 45.72m) rolls

PROPERTY	R/stik Mounting Tape
Total Thickness, in. (mm)	0.005 (0.127)
Peel Strength, oz./in. (g/cm)	75 (840)
Shear Strength, hours (1 sq. in. under 2.2 lb. load)	168 hours
Maximum Continuous Use Temperature	160°F (71°C)
Shelf Life	1 year from date of manufacture

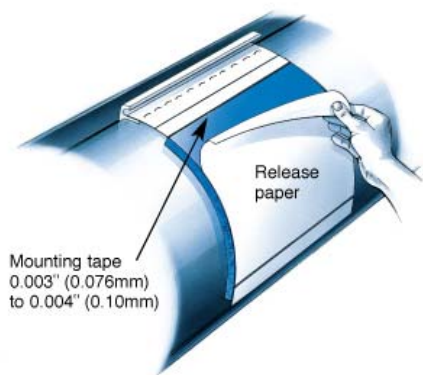

To mount plate to R/bak material:

1. Apply mounting tape to polyester base
2. Be certain air bubbles are not present
3. Peel back release paper
4. The plate can now be adhered to the carrier

The information contained in this Data Sheet is intended to assist you in using Rogers' R/bak Cushion Mounting Materials. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown on the Data Sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers' R/bak Cushion Mounting Materials for each application. The Rogers logo, The world runs better with Rogers., R/bak and R/stik are licensed trademarks of Rogers Corporation. © 2008, 2009 Rogers Corporation, All rights reserved. Printed in U.S.A., 9044-0309-PDF, Publication #12-009