

## PORON® Microcellular Urethanes

PORON Condux Plus: Electrically Conductive Foam						COLOR: Metallic / Black (04)							
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
3037153	Condux Plus 0.5mm	15	240	0.021	0.53	26T	660	99	30.1	215	19.9	28	12.7
3037154*	Condux Plus 0.3mm	18	288	0.013	0.33	24T	609	99	30.1	199	18.4	19	8.6
3048327**	Condux Plus 0.3mm	18	288	0.013	0.33	26T	660	99	30.1	215	19.9	20	9.1

\*This product has limited inventory. Upon depletion, P/N 3048327 will be the exclusive 0.3mm Condux Plus offering.

\*\*This replaces P/N 3037154 once inventory is depleted. These parts are identical with the exception of roll width.

Note: PORON Condux Plus materials require a forecast in advance of an order.

PORON 4701-SGRL: SLIMGRIP- Supported with 2 mil Release Liner						COLOR: GRAY (90)							
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
3041614	4701-SGRL-06020-90	6.5	100	0.020	0.5	40T	1016	350	106.7	1166	108.3	30	13.6

PORON 4701-15: IMPROVED SOFT SEAL- Supported with 2 mil PET						COLOR: GRAY (90)							
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
3036886	4701-15-06021-90 P	6.5	100	0.021	0.53	40T	1016	300	91.4	1000	92.9	24.4	11
3034616	4701-15-06030-90 P	6.5	100	0.030	0.75	54T	1372	300	91.4	1350	125.4	40.5	18.4
3034610	4701-15-06039-90 P	6.5	100	0.039	1.00	51T	1295	300	91.4	1275	118.5	45.9	20.8

PORON SHOCKPAD Material						COLOR: BLACK (04)							
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
3018749	PORON ShockPad 0.30 mm Plus Adhesive	-	-	0.012	0.3	40T	1016	475	144.8	1583	147	50	23
3042505	PORON ShockPad 0.15 mm	-	-	0.006	0.15	54T	1372	500	152.4	2250	209	88	40
3042504	PORON ShockPad 0.10 mm	-	-	0.004	0.1	54T	1372	500	152.4	2250	209	82	37

PORON 4790-79: SHOCKSEAL- Supported with 2 mil PET												COLOR: BLACK (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE						APPROX. WEIGHT	
						WIDTH		LENGTH		TOTAL			
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
3028342	4790-79-09021-04 P	9	144	0.021	0.53	40T	1016	350	106.7	1166	108.4	45	20
3017582	4790-79-09030-04 P	9	144	0.030	0.75	48T	1219	350	106.7	1400	130.1	66	30
3014388	4790-79-09039-04 P	9	144	0.039	1.0	48T	1219	300	91.4	1200	111.5	75	34
3017583	4790-79-12021-04 P	12	192	0.021	0.53	54T	1372	475	144.8	2137	198.6	85	39
3017580	4790-79-12030-04 P	12	192	0.030	0.75	54T	1372	400	121.9	1800	167.2	87	39
3014387	4790-79-12039-04 P	12	192	0.039	1.0	54T	1372	350	106.7	1575	146.3	93	42

PORON 4790-79: SHOCKSEAL												COLOR: BLACK (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE						APPROX. WEIGHT	
						WIDTH		LENGTH		TOTAL			
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
3028591*	4790-79-12080-04	12	192	0.080	2.03	54T	1372	156	47	702	65.2	66	30
3028590	4790-79-12158-04	12	192	0.158	4.01	54T	1372	130	39	585	54	100	46
3022112	4790-79-12375-04	12	192	0.375	9.35	54T	1372	60	18	270	25	114	52
3021325*	4790-79-15125-04	15	240	0.125	3.18	54T	1372	156	47	702	65.2	116	53
3021170	4790-79-15250-04	15	240	0.250	6.35	54T	1372	80	24	360	33	128	58
3022860*	4790-79-20062-04	20	320	0.062	1.57	54T	1372	156	47	702	65.2	80	37
3022862*	4790-79-20093-04	20	320	0.093	2.36	54T	1372	156	47	702	65.2	120	55

\* For shorter rolls please contact your customer service representative.

PORON ThinStik: supported Self-Adhesive Material												COLOR: BLACK (04) & GRAY (90)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE						APPROX. WEIGHT	
						WIDTH		LENGTH		TOTAL			
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
2306970	4790-92TS1-12020-04	12	192	0.020	0.50	54U	1372	475	144.8	2137	198.6	110	50
3012257	4790-92TS1-09020-04	9.0	144	0.020	0.50	40T	1016	350	106.7	1166	108.4	57.1	25.9
3015310	4701-15TS1-06021-90	6.5	100	0.021	0.50	30T	762	300	91.4	750	69.6	19.5	8.8
3016518	4701-15TS1-06030-90	6.5	100	0.030	0.75	40T	1016	300	91.4	1000	92.9	30	13.6
3020356	4790-79TS1-09021-04	9.0	144	0.021	0.50	40T	1016	350	106.7	1166	108.4	57.1	25.9

PORON 4790-92: EXTRA SOFT-SLOW REBOUND- Supported with 2 mil PET											COLOR: BLACK (04)		
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
2300392	4790-92-30012-04 P	30	480	0.012	0.30	54U	1372	600	182.9	2700	250.8	119	54
2300389	4790-92-25021-04 P	25	400	0.021	0.53	54U	1372	475	144.8	2137	198.6	119	54
2300327	4790-92-25024-04 P	25	400	0.024	0.61	54U	1372	475	144.8	2137	198.6	137	62
2300388	4790-92-25031-04 P	25	400	0.031	0.79	54U	1372	400	121.9	1800	167.2	176	80
2300387	4790-92-25041-04 P	25	400	0.041	1.04	54U	1372	350	106.7	1575	146.3	158	72
2300386	4790-92-20081-04 P	20	320	0.081	2.06	54T	1372	225	68.6	1012	94.1	151	68
2300320	4790-92-15039-04 P	15	240	0.039	1.00	54U	1372	350	106.7	1575	146.3	95	43
2300385	4790-92-15120-04 P	15	240	0.120	3.05	54T	1372	165	50.3	742	69.0	123	56
2300314	4790-92-12020-04 P	12	192	0.020	0.50	54T	1372	475	144.8	2137	198.6	57	26
2300307	4790-92-12030-04 P	12	192	0.030	0.75	54T	1372	400	121.9	1800	167.2	67	30
2300319	4790-92-12039-04 P	12	192	0.039	1.00	54T	1372	350	106.7	1575	146.3	76	35
2300306	4790-92-12049-04 P	12	192	0.049	1.25	54T	1372	350	106.7	1575	146.3	86	39
2300308	4790-92-12059-04 P	12	192	0.059	1.50	54T	1372	300	91.4	1350	125.4	97	44
3036885	4790-92-09020-04 P	9	144	0.020	0.50	54T	1372	350	106.7	1575	146.3	44	20
3036884	4790-92-09030-04 P	9	144	0.030	0.75	54T	1372	350	106.7	1575	146.3	57	26
3020231	4790-92-09039-04 P	9	144	0.039	1.00	54U	1372	300	91.4	1350	125.4	60	27

PORON 4790-92: EXTRA SOFT-SLOW REBOUND											COLOR: BLACK (04)		
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
2300376	4790-92-15125-04	15	240	0.125	3.18	54T	1372	165	50.3	742	69.0	122	55
2300377	4790-92-15188-04	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51
2300378	4790-92-15250-04	15	240	0.250	6.35	54T	1372	80	24.4	360	33.4	118	54
2300379	4790-92-15375-04	15	240	0.375	9.53	54T	1372	60	18.3	270	25.1	133	60
2300380	4790-92-15500-04	15	240	0.500	12.70	54T	1372	40	12.2	180	16.7	118	54
3025634	4790-92-12125-04	12	192	0.125	3.18	54T	1372	150	45.7	675	62.7	85	39
2300412	4790-92-12155-04	12	192	0.155	3.94	54T	1372	100	30.5	450	41.8	70	32
2300344	4790-92-12375-04	12	192	0.375	9.53	54T	1372	60	18.3	270	25.1	101	46

PORON 4790-92: DURA-SHAPE- Supported with 2 mil PET in middle											COLOR: BLACK (04)		
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
2308028	4790-92-20093-04 PY2MID	20	320	0.093	2.36	54T	1372	225	68.6	1012	94.1	163	74
2308029	4790-92-20125-04 PY2MID	20	320	0.125	3.18	54T	1372	165	50.3	742	69.0	161	73
2308026	4790-92-15125-04 PY2MID	15	240	0.125	3.18	54T	1372	125	38.1	562	52.21	88	40
2308027	4790-92-15188-04 PY2MID	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51
2308024	4790-92-15250-04 PY2MID	15	240	0.250	6.35	54T	1372	80	24.4	360	33.4	118	54
2308107	4790-92-15375-04 PY2MID	15	240	0.375	9.53	54T	1372	60	18.3	270	25.1	133	60
2308120	4790-92-15500-04 PY2MID	15	240	0.500	12.70	54T	1372	40	12.2	180	16.7	118	54

PORON 4701-30: VERY SOFT												COLOR: BLACK (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
2307587	4701-30-25031-04	25	400	0.031	0.79	54T	1372	150	45.7	675	62.7	50	23
2307590	4701-30-25035-04	25	400	0.035	0.89	54T	1372	150	45.7	675	62.7	55	25
2307591	4701-30-25045-04	25	400	0.045	1.14	54T	1372	150	45.7	675	62.7	69	31
2307522	4701-30-20062-04	20	320	0.062	1.57	54T	1372	300	91.4	1350	125.4	145	66
2307524	4701-30-20093-04	20	320	0.093	2.36	54T	1372	225	68.6	1012	94.1	163	74
2307525	4701-30-20125-04	20	320	0.125	3.18	54T	1372	165	50.3	742	69.0	161	73
2307526	4701-30-15188-04	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51
2307527	4701-30-15250-04	15	240	0.250	6.35	54T	1372	80	24.4	360	33.4	118	54
2307528	4701-30-15375-04	15	240	0.375	9.53	54T	1372	60	18.3	270	25.1	133	60
2307529	4701-30-15500-04	15	240	0.500	12.70	54T	1372	40	12.2	180	16.7	118	54

PORON 4701-30: VERY SOFT- Supported with 2 mil PET												COLOR: BLACK (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
2307489	4701-30-25021-04 P	25	400	0.021	0.53	54U	1372	475	144.8	2137	198.6	124	56
2307631	4701-30-25037-04 P	25	400	0.037	0.94	54U	1372	400	121.9	1800	167.2	164	75
2307462	4701-30-25047-04 P	25	400	0.047	1.19	54U	1372	350	106.7	1575	146.3	179	81
2307649	4701-30-20064-04 P	20	320	0.064	1.63	54U	1372	275	83.8	1237	115.0	151	68
2307648	4701-30-20095-04 P	20	320	0.095	2.41	54U	1372	225	68.6	1012	94.1	175	80

PORON 4701-30: DURA-SHAPE- Supported with 2 mil PET in middle												COLOR: BLACK (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
2308017	4701-30-20093-04 PY2MID	20	320	0.093	2.36	54T	1372	225	68.6	1012	94.1	163	74
2308021	4701-30-20125-04 PY2MID	20	320	0.125	3.18	54T	1372	165	50.3	742	69.0	161	73
2308014	4701-30-15188-04 PY2MID	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51
2308015	4701-30-15250-04 PY2MID	15	240	0.250	6.35	54T	1372	80	24.4	360	33.4	118	54
2308016	4701-30-15375-04 PY2MID	15	240	0.375	9.53	54T	1372	60	18.3	270	25.1	133	60
2308047	4701-30-15500-04 PY2MID	15	240	0.500	12.70	54T	1372	40	12.2	180	16.7	118	54

PORON AQUAPRO 4701-37: VERY SOFT - Enhanced Sealability												COLOR: Black (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE							
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT	
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
3048167	4701-37-14059-04P	14	224	0.059	1.50	54T	1372	225	68.6	1012	94.1	75	34
3047655	4701-37-14118-04	14	224	0.118	3.00	54T	1372	165	50.3	742	69.0	110	50
3050676	4701-37-14256-04	14	224	0.256	6.50	54T	1372	80	24.4	360	33.4	115	52
3049342	4701-37-14374-04	14	224	0.374	9.50	54T	1372	60	18.3	270	25.1	126	57

PORON 4701-40: SOFT											COLOR: BLACK (04)			
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE								
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT		
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg	
2302497	4701-40-30031-04	30	480	0.031	0.79	54T	1372	150	45.7	675	62.7	58	26	
2302496	4701-40-30045-04	30	480	0.045	1.14	54T	1372	150	45.7	675	62.7	82	37	
2302423	4701-40-20062-04	20	320	0.062	1.57	54T	1372	300	91.4	1350	125.4	145	66	
2303420	4701-40-20093-04	20	320	0.093	2.36	54T	1372	225	68.6	1012	94.1	163	74	
2302424	4701-40-20125-04	20	320	0.125	3.18	54T	1372	165	50.3	742	69.0	161	73	
2303423	4701-40-15125-04	15	240	0.125	3.18	54T	1372	165	50.3	742	69.0	116	53	
2302425	4701-40-15188-04	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51	
2303425	4701-40-15250-04	15	240	0.250	6.35	54T	1372	80	24.4	360	33.4	118	54	
2303432	4701-40-15375-04	15	240	0.375	9.53	54T	1372	60	18.3	270	25.1	133	60	
2303433	4701-40-15500-04	15	240	0.500	12.70	54T	1372	40	12.2	180	16.7	118	54	

PORON 4701-40: SOFT- Supported by 2 mil PET											COLOR: BLACK (04)			
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE								
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT		
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg	
2302437	4701-40-20125-04 P	20	320	0.125	3.18	54U	1372	165	50.3	742	69.0	155	70	

PORON 4701-40: DURA-SHAPE- Supported with 2 mil PET in middle											COLOR: BLACK (04)			
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE								
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT		
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg	
2308041	4701-40-20093-04 PY2MID	20	320	0.093	2.36	54T	1372	225	68.6	1012	94.1	163	74	
2308040	4701-40-20125-04 PY2MID	20	320	0.125	3.18	54T	1372	165	50.3	742	69.0	161	73	
2308112	4701-40-15250-04 PY2MID	15	240	0.250	6.35	54T	1372	80	24.4	360	33.4	118	54	
2308043	4701-40-15375-04 PY2MID	15	240	0.375	9.53	54T	1372	60	18.3	270	25.1	133	60	
2308042	4701-40-15500-04 PY2MID	15	240	0.500	12.70	54T	1372	40	12.2	180	16.7	118	54	

PORON AQUAPRO 4701-41: SOFT-ENHANCED SEALABILITY											COLOR: BLACK (04)			
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE								
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT		
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg	
2302848	4701-41-30031-04	30	480	0.031	0.79	54T	1372	150	45.7	675	62.7	58	26	
2302849	4701-41-30045-04	30	480	0.045	1.14	54T	1372	150	45.7	675	62.7	82	37	
2302839	4701-41-20062-04	20	320	0.062	1.57	54T	1372	300	91.4	1350	125.4	145	66	
2302843	4701-41-20093-04	20	320	0.093	2.36	54T	1372	225	68.6	1012	94.1	163	74	
2302837	4701-41-20125-04	20	320	0.125	3.18	54T	1372	165	50.3	742	69.0	161	73	
2302840	4701-41-15188-04	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51	
2302841	4701-41-15250-04	15	240	0.250	6.35	54T	1372	80	24.4	360	33.4	118	54	
2302842	4701-41-15375-04	15	240	0.375	9.53	54T	1372	60	18.3	270	25.1	133	60	
2302850	4701-41-15500-04	15	240	0.500	12.70	54T	1372	40	12.2	180	16.7	118	54	

PORON AQUAPRO 4701-41: DURA-SHAPE- Supported with 2 mil PET in middle														COLOR: BLACK (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE									
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT			
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg		
2308119	4701-41-20093-04 PY2MID	20	320	0.093	2.36	54T	1372	225	68.6	1012	94.1	163	74		
2308113	4701-41-15188-04 PY2MID	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51		
3015291	4701-41-12375-04 PY2MID	12	192	0.375	9.35	54T	1372	126	38.4	567	52.7	213	97		

PORON 4701-50: FIRM														COLOR: BLACK (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE									
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT			
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg		
2304343	4701-50-30017-04	30	480	0.017	0.43	54T	1372	600	182.9	2700	250.8	121	55		
2304350	4701-50-30020-04	30	480	0.020	0.51	54T	1372	600	182.9	2700	250.8	141	64		
2304351	4701-50-30031-04	30	480	0.031	0.79	54T	1372	150	45.7	675	62.7	58	26		
2304466	4701-50-30045-04	30	480	0.045	1.14	54T	1372	150	45.7	675	62.7	82	37		
2304461#	4701-50-20062-04	20	320	0.062	1.57	54T	1372	300	91.4	1350	125.4	145	66		
2304481#	4701-50-20093-04	20	320	0.093	2.36	54T	1372	225	68.6	1012	94.1	163	74		
2304469#	4701-50-20125-04	20	320	0.125	3.18	54T	1372	165	50.3	742	69.0	161	73		
2304449#	4701-50-15188-04	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51		
2304487#	4701-50-15250-04	15	240	0.250	6.35	54T	1372	80	24.4	360	33.4	118	54		
2304448	4701-50-15375-04	15	240	0.375	9.53	54T	1372	60	18.3	270	25.1	133	60		
2304447	4701-50-15500-04	15	240	0.500	12.70	54T	1372	40	12.2	180	16.7	118	54		

# For higher coefficient of friction requirements, the standard PORON 4701-50 materials from 0.062" to 0.250" are also available in "bottom-side print only".

PORON 4701-50: FIRM-THIN- Supported with 2 mil PET														COLOR: BLACK (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE									
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT			
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg		
2307611	4701-50-30012-04 P	30	480	0.012	0.30	54U	1372	600	182.9	2700	250.8	106	48		

PORON 4701-50: DURA-SHAPE- Supported with 2 mil PET in middle														COLOR: BLACK (04)	
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE									
						WIDTH		LENGTH		TOTAL		APPROX. WEIGHT			
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg		
2308031	4701-50-20093-04 PY2MID	20	320	0.093	2.36	54T	1372	225	68.6	1012	94.1	163	74		
2308030	4701-50-20125-04 PY2MID	20	320	0.125	3.18	54T	1372	165	50.3	742	69.0	161	73		
2308034	4701-50-15188-04 PY2MID	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51		
2308125	4701-50-15500-04 PY2MID	15	240	0.500	12.70	54T	1372	40	12.2	180	16.7	118	54		

PORON 4701-60: VERY FIRM										COLOR: BLACK (04)			
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE						APPROX. WEIGHT	
						WIDTH		LENGTH		TOTAL			
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
2304521	4701-60-25031-04	25	400	0.031	0.79	54T	1372	300	91.4	1350	125.4	93	42
2304511	4701-60-25062-04	25	400	0.062	1.57	54T	1372	150	45.7	675	62.7	93	42
2304512	4701-60-25093-04	25	400	0.093	2.36	54T	1372	225	68.6	1012	94.1	202	92
2304547	4701-60-20031-04	20	320	0.031	0.79	54T	1372	300	91.4	1350	125.4	76	34
2304545	4701-60-20062-04	20	320	0.062	1.57	54T	1372	150	45.7	675	62.7	76	34
2304541	4701-60-20125-04	20	320	0.125	3.18	54T	1372	165	50.3	742	69.0	161	73
2304557	4701-60-20188-04	20	320	0.188	4.78	54T	1372	100	30.5	450	41.8	147	67
2304546	4701-60-15188-04	15	240	0.188	4.78	54T	1372	100	30.5	450	41.8	112	51
2304522	4701-60-15250-04	15	240	0.250	6.35	54T	1372	80	24.4	360	33.4	118	54

PORON 4701-V0-M: UL94 V-0 MEDIUM										COLOR: SMOKE GRAY (107)			
PRODUCT NUMBER	PRODUCT DESCRIPTION	DENSITY		THICKNESS		TYPICAL ROLL SIZE						APPROX. WEIGHT	
						WIDTH		LENGTH		TOTAL			
		lbs/ft <sup>3</sup>	kg/m <sup>3</sup>	inches	mm	inches	mm	feet	m	ft <sup>2</sup>	m <sup>2</sup>	lbs.	kg
3044284	4701-V0-M-25197-107	25	400	0.197	5.0	54T	1372	100	30.5	450	41.8	191	86
3044283	4701-V0-M-25236-107	25	400	0.236	6.0	54T	1372	80	24.4	360	33.4	183	83





**Order Placement** – Orders will be accepted by phone, e-mail or fax, but errors in transmission are the customer’s responsibility. Phone orders require a written confirmation either via mail or fax. The order must be clearly marked “Confirming” or the cost due to a duplicate shipment will be the customer’s responsibility. Orders for PORON Condux Plus materials require a forecast in advance of order placement.

**Order Acknowledgment** – All orders are subject to written acceptance at all Rogers Corporation locations for adherence to these guidelines and policies as well as all other “standard terms and conditions of sale”. A copy of the Rogers’ standard terms and conditions of sale is available upon request. Rogers Corporation will normally confirm orders within 24 hours or less.

**Minimum Order Size** – An order minimum of three standard rolls per line item applies for Major Converters and Converters. An order minimum of one standard roll per line item applies to Preferred Converters. A three roll minimum applies for all Converter levels when ordering PORON® Dura-Shape™ products.

**Blanket Orders** – Single product blanket orders will typically be accepted with a maximum of three (3) releases within ninety (90) days, provided each release meets the line item minimum order size. Additions to blanket orders are subject to approval. An appropriate shipping schedule must accompany the order.

**Shipping and Handling** – In North America, customers may choose a preferred carrier. If specific shipment instructions are not chosen, an appropriate means of shipment will be selected. Third party billing instructions must be stated on the original Purchase Order or the shipment will automatically be shipped collect. Customers may take advantage of Rogers Corporation house carrier discount. Materials will be shipped pre-paid and added to the invoice. A 20% fee may be charged for drop shipping. In Europe, all orders are shipped Delivered Duty Paid (DDP) with Rogers own carrier. In Asia, customers may also take advantage of Rogers Corporation house carrier discount. Materials will be shipped pre-paid and actual freight will be added to the invoice.

**Payment Terms** – Terms of payment are customer specific and set by Rogers Finance Department. All prices are listed in U.S. dollars and are noted for measurements shown.

**Sample Policy** – Standard sample sizes are 8.5" x 11" sheets (maximum 10), A4 size sheets in Europe and Asia (maximum 10) or 3 ft linear roll (maximum 2, not available for Dura-Shape products) or mini rolls (maximum 1) per line item. Larger samples may be requested, but may be subject to a surcharge. Condux Plus samples are limited to 8.5" x 11" sheets (maximum 2).

**Availability of Standard Materials** – All products shown within this list are considered “standard materials”. Most PORON® urethane materials are produced on a “make to order” basis. Normal lead times apply, although off-the-shelf stock may be available for standard grades and thicknesses. Check with Rogers’ Customer Service for your specific requirements.

**Tolerances** – Length tolerance of rolls shipped is +5%/-0% of ticketed length. A maximum of one splice is allowed per roll. Most PORON urethanes are trimmed to stated width +1 inch/-0. Special notation is made after the width, “U”, for materials that are provided untrimmed. Untrimmed materials will be fractionally wider than the stated width. The stated width is the amount of good material charged for. Untrimmed materials are also available on special order. Thickness tolerances for materials are listed on individual product Data Sheets.

**Supported Materials** – Standard supported materials are offered on 2 mil (.002" or 0.05mm) polyester (PET) film. The bond of the foam to the film will be permanent.

**Surface Preparation** – All standard unsupported PORON materials are “printed” with acrylic coating on both sides for your ease of handling. PORON urethanes may be available printed on one side for specialty applications. An increase in blocking may be experienced with material printed on one side only. All standard supported PORON materials are “printed” with acrylic coating on the non-PET side.

**Buffing** – Many PORON urethanes can be buffed to remove the skin. Buffed thickness tolerance are ±5% on thicknesses down to 0.080" (2mm) and ±0.004" (±0.01mm) on thicknesses less than 0.080" (2mm). Buffed materials are subject to higher minimum order quantities, upcharges, and lead times. The minimum order quantity for buffing follows the non-standard ordering guidelines below. Materials requiring buffing or any other secondary operation are subject to an additional one week lead time.

**Availability of Non-Standard Materials** – For available non-standard thicknesses and widths call Rogers Customer Service. To obtain a non-standard color (for available colors, see color card) ask Rogers Customer Service. Custom colors are available and are subject to higher minimum orders and color matching charges. Non-standard materials are subject to an upcharge (for orders less than 10,000 ft<sup>2</sup> (929m<sup>2</sup>) in North America) and the following minimum order quantities:

Condition	Non-Standard Minimum Quantity
> 0.188" thickness in black	3,000 ft <sup>2</sup> (279 m <sup>2</sup> )
< 0.188" thickness in black	4,000 ft <sup>2</sup> (372 m <sup>2</sup> )
Anything on PET	5,000 ft <sup>2</sup> (465 m <sup>2</sup> )
All colors other than black	5,000 ft <sup>2</sup> (465 m <sup>2</sup> )

**Cancellation** – A cancellation charge will be applied if manufacturing of a material has been started, completed or where special raw materials have been purchased. If the material is deemed resalable, a 15% restocking fee may be applied. If the material is deemed not resalable, a full (100%) cancellation charge will apply. Cancellation charges will not apply if: (1) the order has not been scheduled. (2) the order has been scheduled but no special material or labor costs have been incurred. In Europe, cancellation requests are treated on a case by case basis.

**Product Complaints** – Product complaints should be directed to Rogers’ Customer Service. A response will be provided in a timely fashion.

**Technical Assistance** – In North America, contact the Rogers Solutions Center at 607.785.8112 or email solutions@rogerscorporation.com, or call your local Rogers Sales Office for information on products or capabilities. In Europe, contact Rogers BVBA at 32-9-235-3611 or your local Rogers Sales Office. In Asia, contact your local Rogers Sales Office.

**Overshipment or Undershipment** – All standard materials (noted on this list), are subject to a ±5% shipment of total volume. If exact quantity is required, please note at time of order. All non-standard materials are subject to a ±10% shipment of total volume. Non-standard materials are classified as non-standard roll lengths, thicknesses, widths, or colors, and value-added operation materials.

**Returns** – Rogers Corporation must be notified within 30 days of shipment regarding product non-conformances. Rogers Customer Service must issue a Return Material Authorization, after which the customer has 30 days to return product for credit. Returned materials must be properly packaged to prevent damage, and must carry lot numbers. Rogers Corporation reserves the right not to accept returned materials if they are damaged. The following conditions apply:

\* All returns are subject to approval. Standard, conforming product being returned may be subject to a restocking fee of 15% of the purchase price and the customer is responsible for freight costs.

\* Non-Standard materials will not be accepted unless it is a quality issue, and is approved for return. Customarily a sample of the defective material will have to be sent to obtain approval.

PORON® Cellular Urethane foams offer a broad range of design solutions for gasketing, sealing and energy absorption. Low compression set and low outgassing features make these foams ideal for applications in telecommunications, automotive, electronic, and other industrial market segments.


PORON Urethanes are flexible, high density, microcellular products that offer design engineers many outstanding features. PORON foams maintain excellent resistance to compression set, exhibit high resiliency, provide good vibration damping and impact absorption. Parts made from PORON urethanes continue to perform after constant and repeated deflection. Components will not loosen and gasketing integrity will be maintained.

**KEY FEATURES / BENEFITS**

- Excellent compression set resistance for durable, long-term performance.
- Meets several flammability requirements including MVSS 302 and UL HBF.
- Excellent performance over a broad temperature range (-40°C to 90°C).
- Quality manufacturing provides consistent easy-to-process roll goods.
- Low-outgassing prevents component fogging, corrosion, and embrittlement.
- Available in many densities, thicknesses, and surface finishes, providing wide design latitude.
- Good chemical resistance.

**PRODUCT IDENTIFICATION**

Example: 4701-40-15188-04

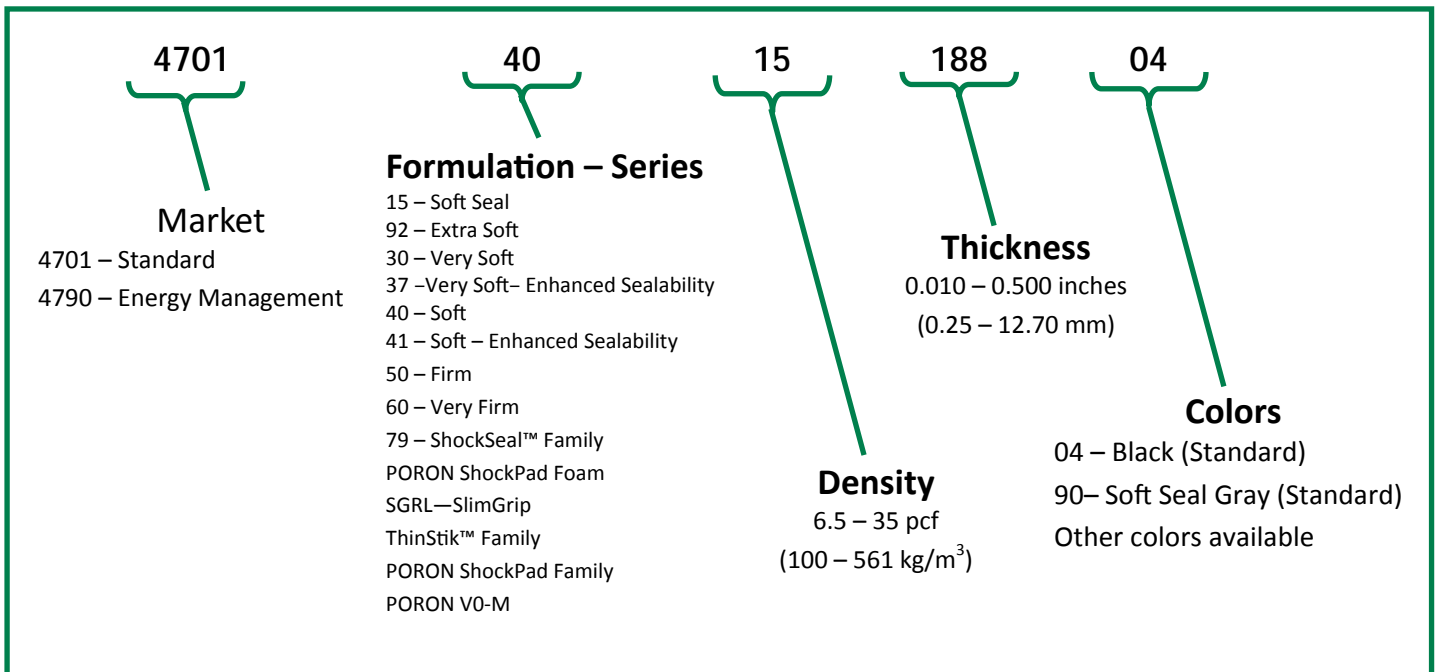

[www.rogerscorp.com](http://www.rogerscorp.com)

The information contained in this product availability booklet is intended to assist you in designing with Rogers’ high performance foams. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown on the product availability booklet will be achieved by a user for a particular purpose. The user is responsible for determining the suitability of Rogers’ high performance foams for each application.

**World Class Performance**

Rogers Corporation (NYSE:ROG) is a global leader in engineered materials to power, protect, and connect our world. With more than 180 years of materials science experience, Rogers delivers high-performance solutions that enable clean energy, internet connectivity, advanced transportation and other technologies where reliability is critical. Rogers' delivers Power Electronics Solutions for energy-efficient motor drives, vehicle electrification and alternative energy; High Performance Foams for sealing, vibration management and impact protection in mobile devices, transportation interiors, industrial equipment and performance apparel; and Printed Circuit Materials for wireless infrastructure, automotive safety and radar systems. Headquartered in Connecticut (USA), Rogers operates manufacturing facilities in the United States, China, Germany, Belgium, Hungary, and South Korea, with joint ventures and sales offices worldwide.

**For more information on PORON® Urethanes visit [www.rogerscorp.com/hpf](http://www.rogerscorp.com/hpf)**

**North America**

**High Performance Foams Division**

**PORON® Urethane Foams**

Woodstock, CT, USA

Tel: 860.928.3622

Fax: 860.928.7843

Toll Free: 800.755.6766

[samples@rogerscorp.com](mailto:samples@rogerscorp.com)

**Europe**

**Rogers BVBA**

Gent, Belgium

Tel: +32 9 2353611

Fax: +32 9 2353658

**Asia**

**Rogers Japan, Inc.**

Tokyo, Japan

Tel: 81-3-5200-2700

Fax: 81-3-5200-0571

**Rogers Korea, Inc.**

Kyungki-do, Korea

Tel: 82-31-291-3660

Fax: 82-31-291-3610

**Rogers Taiwan, Inc.**

Taipei Hsien, Taiwan, Republic of China

Tel: 886-2-8660-9056

Fax: 886-2-8660-9057

**Rogers Technologies Singapore Inc.**

Singapore

Tel: 65-6747-3521

Fax: 65-6747-7425

**Rogers (Shanghai) International Trading Co., Ltd.**

Shanghai, China

Tel: 86-21-6217-5599

Fax: 86-21-6267-7913

**Rogers Shenzhen**

Shenzhen, China

Tel: 86-755-8236-6060

Fax: 86-755-8236-6123

**Rogers Beijing**

Beijing, China

Tel: 86-10-8559-7599

Fax: 86-10-8559-7585

The Rogers logo, The world runs better with Rogers., PORON, ShockSeal, Dura-Shape, SlimGrip, ThinStik, Condux Plus and AquaPro are licensed trademarks of Rogers Corporation.

©2009-2015 Rogers Corporation. All rights reserved.

0115-PDF, **Publication #17-082**