



PORON® Urethane Compression Force Deflection Curves
Compression Force Deflection (strain rate 0.1 in/min)


4701-15 Soft Seal

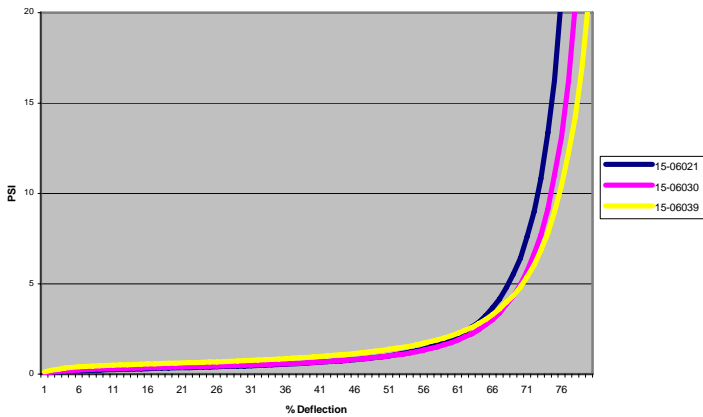


4790-92 Extra Soft

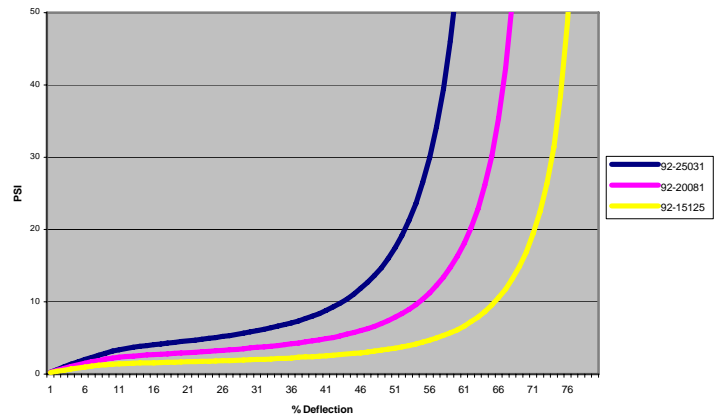

4701-30 Very Soft

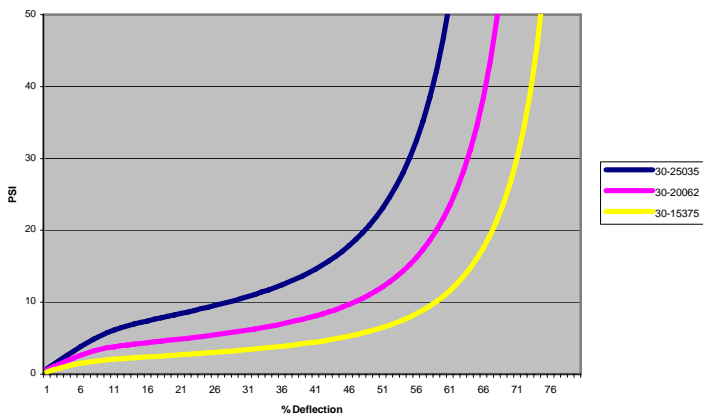

4701-40 Soft

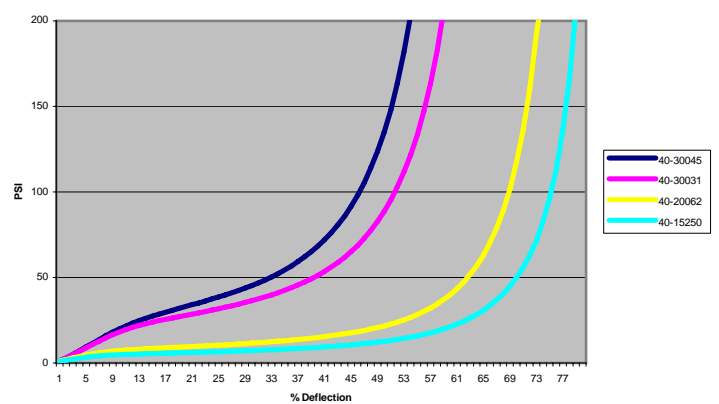


Continued on reverse


The information contained in this Industrial Sales Bulletin is intended to assist you in designing with Rogers High Performance Foam Materials. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown in this Industrial Sales Bulletin will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers High Performance Foam Materials for each application.

The world runs better with Rogers.®


**4701-41 Soft
Enhanced Sealability**

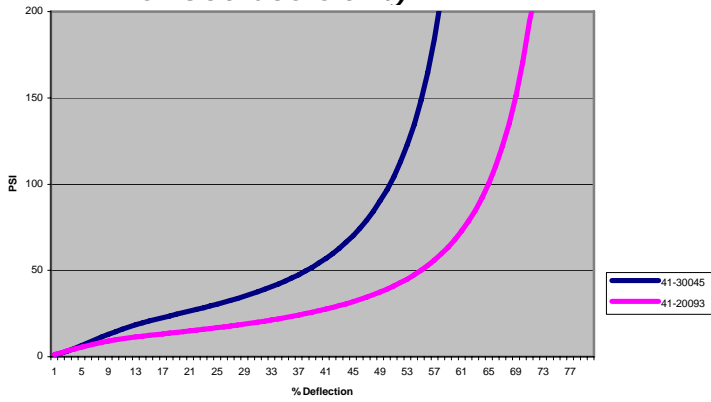

4701-50 Firm

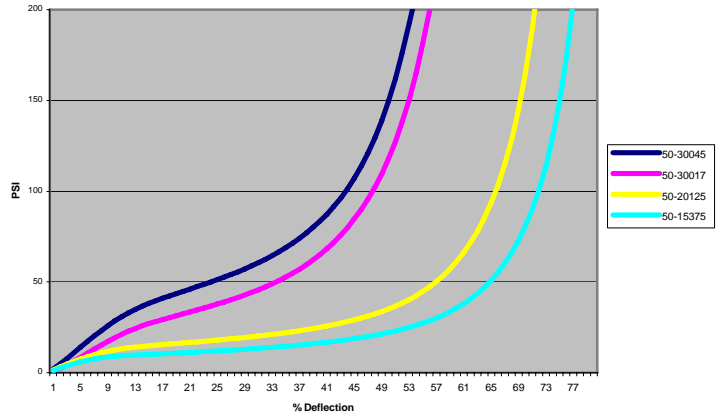

4701-60 Very Firm

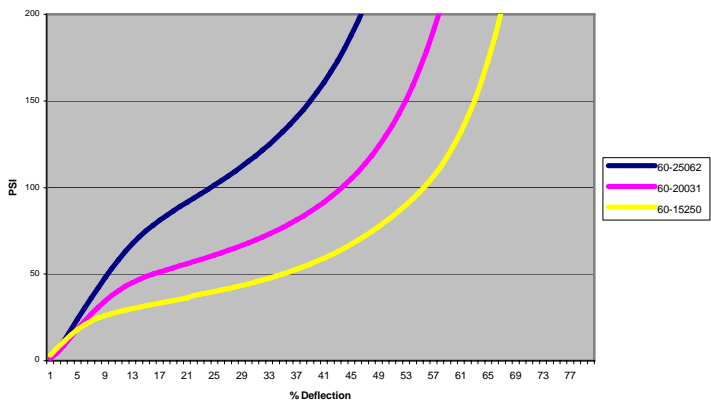

The information contained in this Industrial Sales Bulletin is intended to assist you in designing with Rogers High Performance Foam Materials. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown in this Industrial Sales Bulletin will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers High Performance Foam Materials for each application.