


## R/bak® SR 2000 Product Information

### Product Features

Two Compressibilities:

- SR 2100 soft, for demanding process and combination applications
- SR 2500, a firmer material, for solid and line work

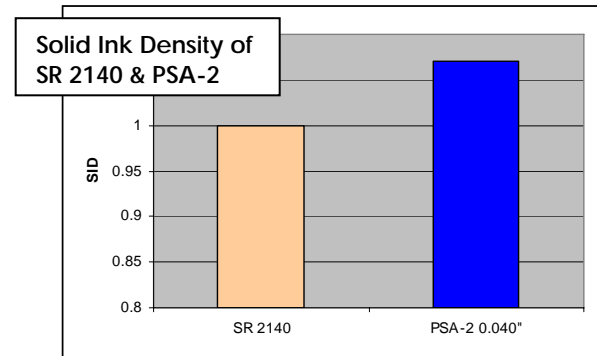


### General Tape Properties

	SR 2100	SR 2500
<b>Foam Type</b>	Open Cell Urethane	
<b>Compressibility @ 25%</b>	26 psi (1.83kg/cm <sup>2</sup> )	43 psi (3.0 kg/cm <sup>2</sup> )
<b>Adhesive Type</b>	Rubber Based Pressure Sensitive Adhesive	
<b>Plate Side Adhesive Tack</b>	L	(Chino) for photopolymer plates
	M	Not Available (Bone) for photopolymer plates
	H	Not Available (Black) rubber or thick photopolymer plates
<b>Cylinder Side Adhesive</b>	S	Designed for good bond to cylinder and easy to remove when the job is finished
<b>Release Liner</b>	Polycoated Paper	
<b>Constant Use Temp (Max.)</b>	150°F (66°C)	
<b>Solvent Resistance</b>	Good with normal flexo cleaning solutions. Use with Ketones, esters, and chlorinated hydrocarbons is not recommended	
<b>Shelf Life</b>	12 months from date of receipt by customer when stored in original carton at 70°F(21°C) and 50% relative humidity	
<b>Thickness Tolerance</b>	+/-0.003 in. (+/-0.076mm)	
<b>LS = Low Tack, MS = Medium Tack, HS = High Tack</b>		

The information contained in this Sell Sheet is intended to assist you in using Rogers' R/bak SR 2000 Products. It is not intended to and does not create any warranties; express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown on the Sell Sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers' R/bak SR 2000 Products for each application. The Rogers logo, The world runs better with Rogers. and R/bak are licensed trademarks of Rogers Corporation. © 2008 Rogers Corporation. All rights reserved. Printed in USA, 8134-1208-PDF, Publication #12-105

## Product Benefits

- Easy repositioning of plate and tape during make-ready
- No adhesive transfer to plates or cylinders
- Provides consistent print results
- Reduced dot gain, maintains higher solid ink densities and eliminates gear banding

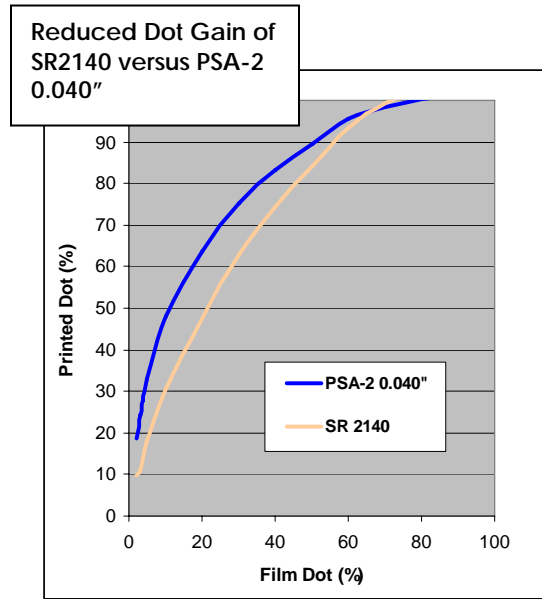

## Product Availability

Product	Thickness		Plate Side Adhesive Level			Available Widths US Units (Metric)		Standard Lengths US Units (Metric)	Color
	Inch.	Mm	L	M	H	20"	40"		
						(.508m)	(1.02m)		
SR 2100	0.040"	1.02	✓			A	A	50 ft. (15.24m)	Chino
	0.060"	1.52	✓			A		50 ft. (15.24m)	Chino
SR 2500	0.020"	0.51		✓		S	A	67 ft. (20.42m)	Bone
	0.020"	0.51			✓	A		67 ft. (20.42m)	Black
	0.040"	1.02		✓		A	A	50 ft. (15.24m)	Bone

**Plate Side Adhesive Level:** L = Low M = Medium H = High  
**Availability:** S = Standard A = Available

The information contained in this Sell Sheet is intended to assist you in using Rogers' R/bak SR 2000 Products. It is not intended to and does not create any warranties; express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown on the Sell Sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers' R/bak SR 2000 Products for each application. The Rogers logo, The world runs better with Rogers. and R/bak are licensed trademarks of Rogers Corporation. © 2008 Rogers Corporation. All rights reserved. Printed in USA, 8134-1208-PDF, Publication #12-105