



XtremeSpeed™ RO1200™ Series Circuit Materials

Extremely Low Loss
Digital Circuit Laminates




XtremeSpeed™ RO1200™ extremely low loss digital circuit materials are ceramic-filled laminates reinforced with woven fiberglass. These materials are engineered to offer exceptional electrical performance and mechanical stability for the most demanding high speed applications.

XtremeSpeed RO1200 series laminates combine the surface smoothness of a non-woven PTFE laminate, for finer line etching tolerances, with the rigidity of a woven-glass PTFE laminate. These materials can be fabricated into printed circuit boards using standard PTFE circuit board processing techniques as described in the application note, XtremeSpeed RO1200 Extremely Low Loss Digital Laminate Quick Reference Processing Guide.

XtremeSpeed RO1200 series laminates are manufactured under an ISO 9001 certified quality system.

Data Sheet

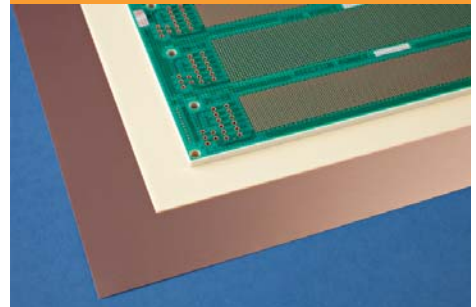

FEATURES AND BENEFITS:

Superior signal integrity

- Low dielectric constant
- Low dissipation factor
- Low profile copper for reduced insertion loss

Excellent thermal/mechanical performance characteristics

- Ideal for high layer count structures
- Suitable for lead free processing
- Td: 500°C (TGA)
- Low CTE

Woven glass reinforcement

- Improved rigidity for ease of handling
- Spread glass for reduced signal skew

TYPICAL APPLICATIONS:

- Core/edge IP routers and switches
- High performance computing (HPC) servers, switching and storage
- Backplanes
- Automated test equipment (ATE)

Advanced Connectivity Solutions

100 S. Roosevelt Avenue, Chandler, AZ 85226

Tel: 480-961-1382 Fax: 480-961-4533 www.rogerscorp.com

| Property | Typical Value RO1200 | Direction | Unit | Condition | Test Method |
|--|-----------------------|-----------|-------------------|-------------------|----------------------------------|
| Dielectric Constant, Process | 3.05 | Z | | 10 GHz 23°C | IPC-TM-650 2.5.5.5 |
| Dielectric Constant, Design ^[1] | TBD | Z | | 1 GHz - 20 GHz | Differential Phase Length Method |
| Dissipation Factor, tan δ | 0.0017 Max | Z | | 10 GHz 23°C | IPC-TM-650 2.5.5.5 |
| Dimensional Stability | 0.22 | X,Y | mil/inch | after etch +E/150 | IPC-TM-650 2.4.39 |
| Volume Resistivity | 1.3 x 10 ⁷ | Z | MΩ•cm | C-96/35/90 | IPC-TM-650 2.5.17.1 |
| Surface Resistivity | 2.5 x 10 ⁶ | Z | MΩ | C-96/35/90 | IPC-TM-650 2.5.17.1 |
| Dielectric Strength | 630 | | V/mil | | IPC-TM-650 2.5.6.2 |
| Moisture Absorption | 0.03 | | % | E-1/105+D-48/50 | IPC-TM-650 2.6.2.1 |
| Specific Heat | 0.93 (0.22) | | J/g/K (BTU/lb•°F) | | Calculated |
| Thermal Conductivity | 0.42 | Z | W/mK | | ASTM D5470 |
| Coefficient of Thermal Expansion | 8 | X,Y | ppm/°C | -55°C to 288°C | IPC-TM-650 2.4.41 |
| | 30 | Z | | | IPC-TM-650 2.4.24 |
| Time to Delamination | >60 | | Minutes | 260°C | IPC-TM-650 2.4.24.1 |
| | >60 | | | 288°C | |
| Td | 500 | | °C | TGA | IPC-TM-650 2.4.24.6 |
| Density | 2.1 | | g/cm ³ | C-24/23/50 | ASTM D792 |
| Copper Peel Strength | >4.5 | | lbs/in | 1 oz ED Foil | IPC-TM-650 2.4.8 |
| Flammability | V-0 | | | | UL 94 |
| Lead Free Process Compatible | YES | | | | |

NOTE:
 [1] The design Dk is an average number from several different tested lots of material and on the most common thickness/s. If more detailed information is required please contact Rogers Corporation or refer to Roger's technical reports on the Rogers Technology Support Hub at www.rogerscorp.com/techub

| Standard Thickness | Standard Panel Size | Standard Copper Cladding |
|--|---|--|
| 0.003" (0.076mm) 0.004" (0.102mm) 0.005" (0.127mm) 0.006" (0.152mm) | 12" X 18" (305 X 457mm) 24" X 18" (610 X 457mm) Additional panel sizes available upon request | ½ oz. (17µm) RA copper foil (AH) 1 oz. (35µm) RA copper foil (A1) 2 oz. (70µm) ED (H2) & RT copper foil (S2) |

The information in this data sheet is intended to assist you in designing with Rogers' circuit materials. It is not intended to and does not create any warranties express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown on this data sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers' circuit materials for each application.

The Rogers' logo, Helping power, protect, connect our World and XtremeSpeed RO1200 are trademarks of Rogers Corporation or one of its subsidiaries.
 © 2018 Rogers Corporation, Printed in U.S.A., All rights reserved.
 Issued 1385 051718 Publication 92-173