


## DeWAL® DW955-40 Laminate

DeWAL® DW955-40 is a laminate of porous PTFE (ePTFE) and a perforated polyfoam backing that allows for the combination of horizontal and vertical vapor release. Ideal for use as a cap liner, it delivers pressure equalization while maintaining positive control of liquids, extending container life and avoiding dangerous over- or under-pressurization conditions. DeWAL DW955 series products can be used with a wide array of chemicals and resist crushing, ensuring a tight seal even if reused.

DeWAL DW955 is suitable for household or other chemical storage containers.

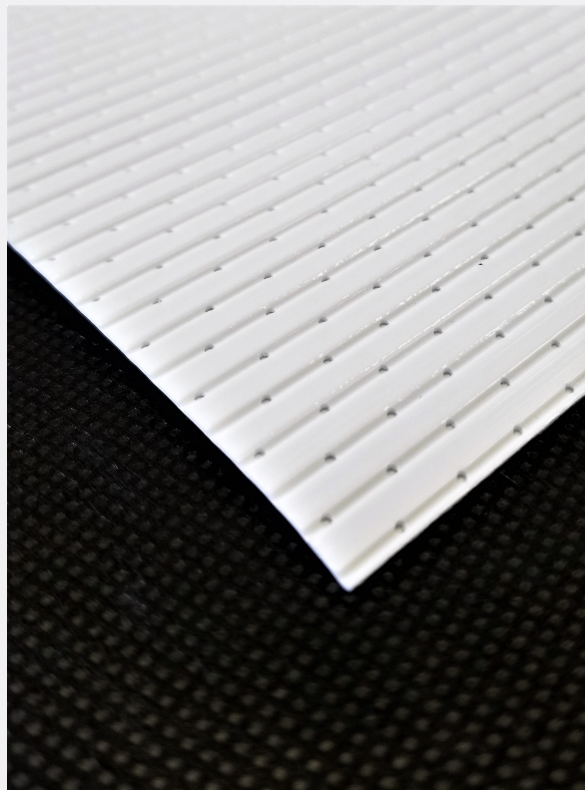

TECHNICAL DATA	TEST METHOD	RESULTS	METRIC RESULTS
Total Laminate Thickness	ASTM D6040	0.044 in. nominal	0.112 cm nominal
Base Film	N/A	ePTFE	N/A
Water Intrusion (Hydrohead)	DW 01-000-10	25 (min)	N/A
Air Flow, seconds, nominal	ISO 5636	Nominal 100 (Gurley)	N/A

PACKAGING SPECIFICATIONS	ENGLISH	METRIC
Max Roll O.D.	7 to 24 in. (product dependent)	17.78 to 60.96 cm (product dependent)
Width	0.5 to 18 in. (product dependent)	1.27 to 45.72 cm (product dependent)
Core Diameter	3, 6, 8 in.	7.62, 15.24, 20.32 cm
Core Type	Plastic and cardboard available	

All metric conversions are approximate.  
Additional technical information is available.  
Typical values should not be used for specification limits.