
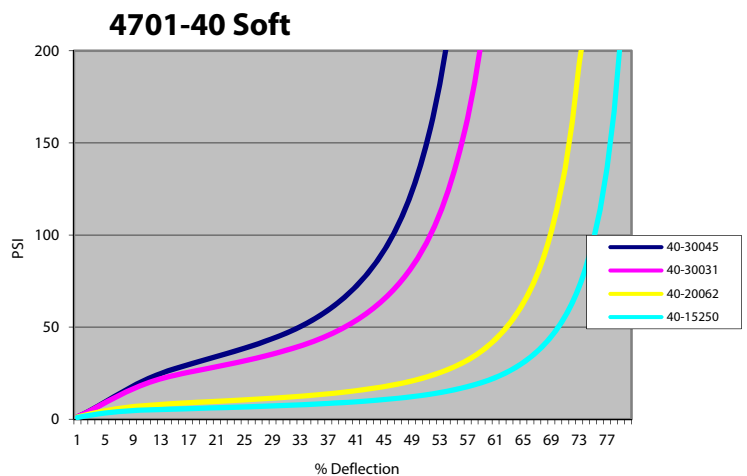
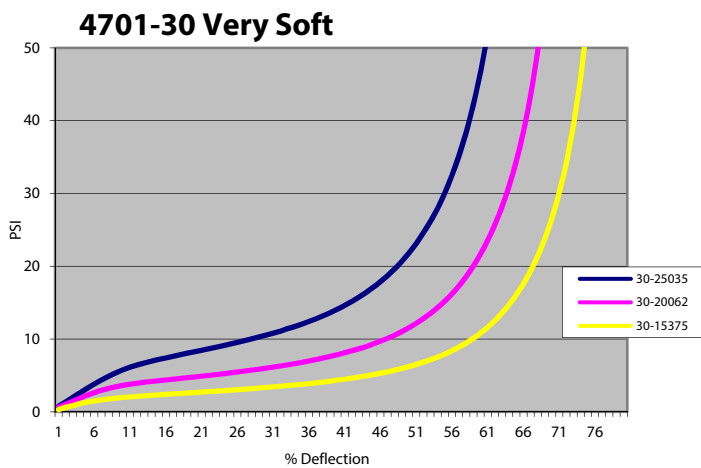
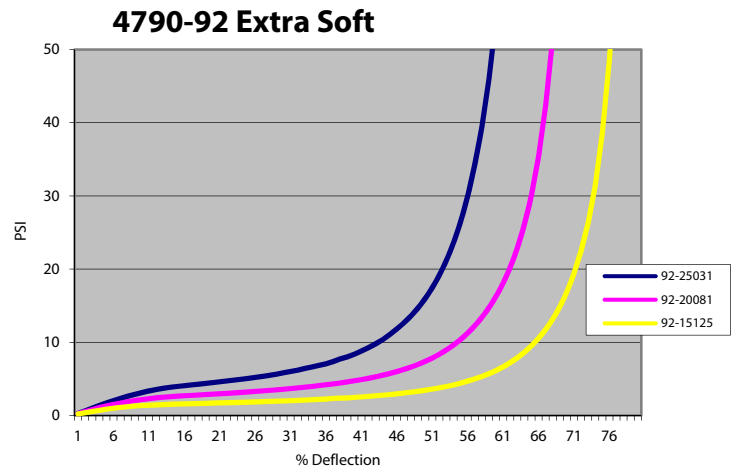



PORON® Polyurethane Compression Force Deflection Curves Compression Force Deflection (strain rate 0.1 in/min)

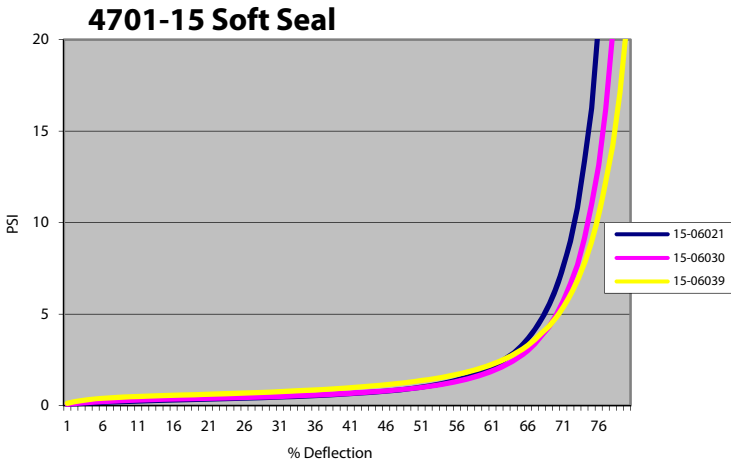


The information contained in this Data Sheet is intended to assist you in designing with Rogers' Elastomeric Material Solutions. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown on the Data Sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers' PORON Polyurethane Materials for each application. The Rogers logo, Helping power, protect, connect our world and PORON are trademarks of Rogers Corporation or one of its subsidiaries. © 2003, 2007, 2018 Rogers Corporation, All rights reserved. Printed in U.S.A., 0918-PDF, Publication #17-073

PORON® Polyurethane Compression Force Deflection Curves - Continued


4701-41 Soft Enhanced Sealability

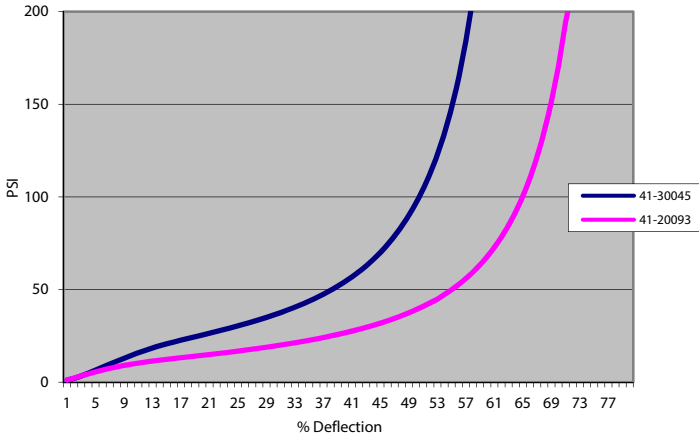

4701-50 Firm

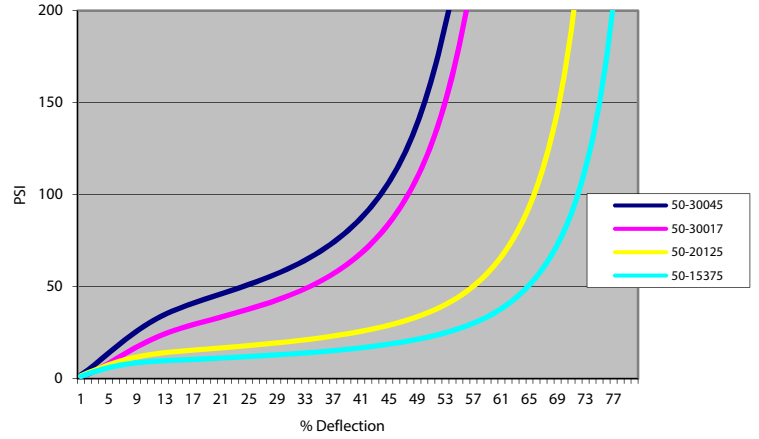

4701-60 Very Firm

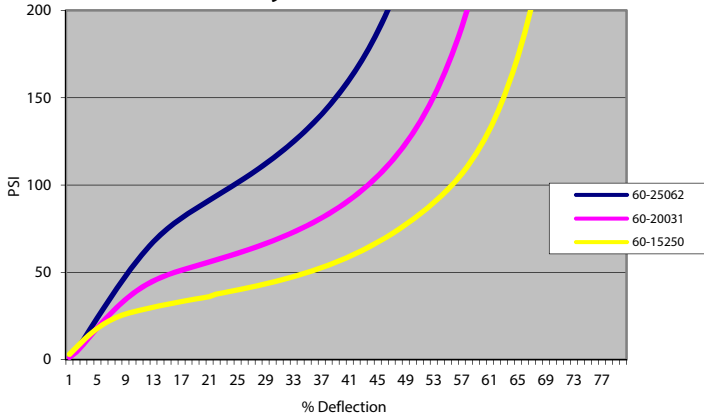

The information contained in this Data Sheet is intended to assist you in designing with Rogers' Elastomeric Material Solutions. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown on the Data Sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers' PORON Polyurethane Materials for each application. The Rogers logo, Helping power, protect, connect our world and PORON are trademarks of Rogers Corporation or one of its subsidiaries. © 2003, 2007, 2018 Rogers Corporation, All rights reserved. Printed in U.S.A., 0918-PDF, Publication #17-073